



IC

1200



Available models:

24 V / 50 A

36 V / 33 A

48 V / 25 A

Delta-Q IC1200

1200 W Industrial Battery Charger

Capable of charging lead acid (wet, AGM, gel) and lithium battery chemistries, the IC1200 Charger is available in on- and off-board configurations. Optional CAN bus communication ensures seamless machine integration and AC/DC cabling is completely customizable. Applications include aerial work platforms, lift trucks, floor care machines, utility vehicles, and motorcycles.



High Reliability

Engineered using design for reliability. Validated for long service life in worst-case operating conditions. Tested to perform reliably and durably in automotive applications. Manufactured in a world class facility specializing in high reliability solutions.



Charge Quality

Charge profiles to precisely charge deep-cycle lead acid and lithium batteries. Developed in Delta-Q's battery lab to balance charge time, battery life and application requirements.



Easy to Integrate

Assists machine troubleshooting with built-in charge cycle tracking. Download data / upgrade software through USB host port. Optional CAN bus communication enables deep machine integration, diagnostics and control.



Global + Efficient

Capable of operating reliably on any single-phase grid worldwide. High-efficiency performance for electricity savings and shorter charge times. Active cooling enables optimal peak performance.


delta-q.com



Additional certifications can be pursued based on market demand.

IC1200 Charger Specifications

DC Output	24 VDC	36 VDC	48 VDC
Maximum DC output voltage	36 V	54 V	72 V
Maximum DC output current	50.0 A	33.3 A	25.0 A
Maximum DC output power	1200 W		
Deep discharge recovery (minimum voltage)	1.2 V	1.8 V	2.4 V
Maximum C3 interlock current	10.0 A	2.0 A	0.5 A
Battery type	Lead acid (wet / AGM / gel), lithium		
Reverse polarity	Electronic protection with auto-reset		
Short circuit	Electronic current limit		

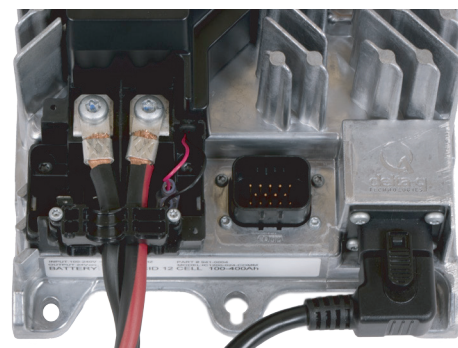

Usability Features

- + Optional CAN bus communication for machine integration or lithium BMS
- + Multi-color LED indicator for AC source, battery status, charging, error, fault
- + Numeric display for charge profile, alarm/fault codes
- + Field programmable with up to 25 charge profiles
- + Auto-recharge for low voltage in maintenance mode
- + OEM customizable, field replaceable cable design
- + Integrated carrying handle

AC Input

AC input voltage range	85-270 VAC	
Nominal AC input voltage	100-240 VAC	
Nominal AC input frequency	50 / 60 Hz	
Maximum AC input current	14.5 A	
Nominal AC input current	13.4 A @ 100 VAC	11.1 A @ 120 VAC
	5.7 A @ 230 VAC	5.5 A @ 240 VAC
Power factor	>0.99 @ 120 VAC	>0.98 @ 230 VAC


Regulatory

Efficiency	90% at full load, 120 VAC, 48 VDC 92% at full load, 240 VAC, 48 VDC California Energy Commission (CEC) compliant	
Safety	UL1564, CSA 107.2, EN 60335-2-29	
Emissions	FCC Part 15 / ICES 003 Class A, EN55011, EN 61000-6-4	
Immunity	EN 61000-3-2, EN 61000-3-3, EN 61000-6-2	

Mechanical

Dimensions	33.5 x 17.9 x 10.5 cm (13.2 x 7.0 x 4.1")	
Weight	4.1 kg (9.0 lbs)	
AC input connector	IEC320 / C14 (requires country-specific cord)	
DC output connector	M6 threaded fasteners for ring terminals (field replaceable)	
Service port	Sealed (IP66) USB 2.0 Host Port (Type A) with dust cover	
Mounting holes	6.4mm (1/4") diameter slots	
Cooling	Active cooling with fan (Variable speed, field serviceable, field replaceable)	

Dimensions

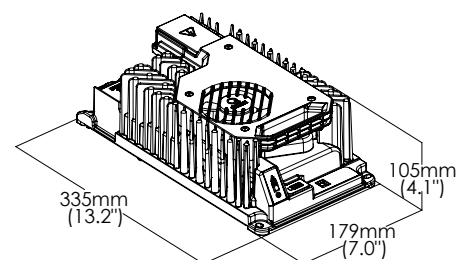

台灣司特克國際有限公司
 新北市三重區興德路84號4樓
 TEL. 02-29956429
 FAX. 02-29957031
 網址: www.taiwtechs.com.tw
 E-mail: taiw@joynice.com.tw

Visit delta-q.com/products to view the complete Delta-Q product portfolio.