




QuiQ™

1000

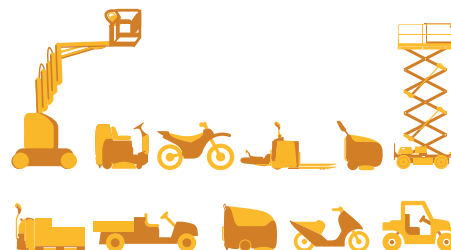

QuiQ™ 1000

1000W Industrial Battery Charger

Available models:

24 V / 25 A	36 V / 21 A	48 V / 18 A	72 V / 12 A	96 V / 8.5 A
-------------	-------------	-------------	-------------	--------------

The QuiQ 1000 is a highly durable on- or off-board charging solution that operates on any single-phase grid worldwide with a 93% peak efficiency. The charger can store 10 lab-validated charge profiles for specific brands or amp-hour ranges of lead acid and lithium motive battery packs, to assist customers in achieving battery charging flexibility. Applications include aerial work platforms, floor care machines, lift trucks, motorcycles, scooters, and utility vehicles.



Proven, Efficient Design

A proven power electronics design with 93% energy efficiency and sealed enclosure to prevent damage from high vibration, extreme ambient temperatures, water, chemicals, and dust ingress.



Easy to Integrate

The QuiQ 1000 can be equipped to go on- or off-board, and is the same mechanical design as all other QuiQ series chargers. Clear display to indicate charging progress and completion. Uses battery maintenance tools for integrated charge cycle and event tracking.



Charge Quality

Charge profiles to precisely charge deep-cycle lead acid and lithium batteries. Developed in Delta-Q's battery lab to balance charge time, battery life and application requirements.



Global Flexibility

Global AC input to be used anywhere in the world, and has comprehensive regulatory approvals, including CEC energy efficiency standards.

delta-q.com



QuiQ 1000 Charger Specifications

DC Output	24 VDC	36 VDC	48 VDC	72 VDC	96 VDC
Maximum DC output power	695 W	875 W	1000 W	1000 W	945 W
Maximum DC output current	25 A	21 A	18 A	12 A	8.5 A
Maximum DC output voltage	34 V	51 V	68 V	100 V	135 V
Deep discharge recovery (minimum voltage)	6 V	9 V	12 V	18 V	24 V
Maximum interlock current	1 A	1 A	1 A	0.5 A	0.5 A
Battery type	Lead acid (Wet / AGM / GEL), lithium ion				
Reverse polarity	Electronic protection with auto-reset				
Short circuit	Electronic current limit				



AC Input

AC input voltage range	85-265 VAC
Nominal AC input voltage	120 VAC / 230 VAC
Supported AC sources	Single phase
AC input frequency	45-65 Hz
Maximum / nominal AC input current	12 A / 9.5 A @120 VAC; 5 A rms @230 VAC
Nominal AC power factor	>0.99 @ 120 VAC; >0.98 @ 230 VAC

Regulatory

Efficiency	93%; California Energy Commission (CEC) compliant
Safety	UL approved to UL1564 3rd Ed. and CSA 107.2, EN 60335-2-29 Designed to meet UL2202 1st Ed.
Emissions	FCC Part 15 / ICES 003 Class A, EN 55011
Immunity	EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 61000-6-4

Mechanical

Dimensions	28.0 x 24.6 x 11.0 cm (10.9 x 9.7 x 4.3")
Weight	< 5 kg. (<11 lbs.)
AC input connector	IEC320/C14 (requires country-specific cord)
DC output connector	OEM specific with 12 AWG wire


Environmental

Enclosure	IP66 (NEMA4)
Operating temperature	-30°C to +50°C (-22°F to 122°F) Derated at >30°C (86°F), <0°C (32°F)
Storage temperature	-40°C to +70°C (-40°F to 158°F)

Usability Features

- + Battery temperature monitor
- + Multi-color LED indicator for >80% charge, full charge, fault
- + Field programmable with up to 10 QuiQ charging profiles
- + Download charge / event data using QuiQ Programmer

Dimensions

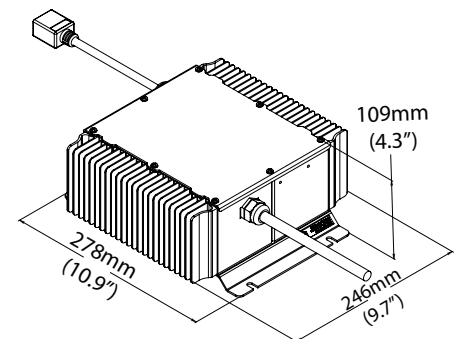

Visit delta-q.com/products to view the complete Delta-Q product portfolio.

台灣司特克國際有限公司
 新北市三重區興德路84號4樓
 TEL. 02-29956429
 FAX. 02-29957031
 網址: www.taiwtechs.com.tw
 E-mail: taiw@joynice.com.tw